

Designed for the professional mechanic, Molnar's range of Two Post Hoists optimise workshop space to maximise working efficiency.

TWO POST HOISTS

M O L N A R



HOISTS

Molnar Hoists manufacture 5 Two Post Hoists together with a range of accessories. All our products are made in Australia and built to the highest safety standards.

Our commitment to excellence is backed by our 3 year warranty.

Intended for use in commercial workshops, these hoists are designed to optimise workshop clear floor space for ease of access, cleaning and freedom of movement for equipment.

With a range of three and four tonne capacity products, overhead clear floor hoists have been designed with enough workable height to accommodate vans and four-wheel drive vehicles with roof racks. These hoists feature a safety bar that prevents further lifting when contacted.



FOUR TONNE TWO POST HOIST

4 PICK-UP PADS INCLUDED

STURDY DESIGN

Hoists are manufactured in South Australia from high quality steel and powder coated for durability.

The electric motor and hydraulic pump form the powerful heart of the hoist, making it among the fastest lifting two post hoists available.

Molnar hoists are designed and tested for maximum longevity, a fact demonstrated by over 30 years of successful operation.

SIMPLE OPERATION

All controls are conveniently located for ease of access with a push button for lifting and a handle for lowering.

The auto release arm locks automatically disengage when hoist is lowered and are height adjustable for sloping or uneven floors.

Comprehensive service manuals and installation guides are supplied with every hoist. Online demonstration videos for selected products and parts are also available.

SAFETY FEATURES

All Molnar hoists meet Australian standards (AS/NZ 1418.9:1996).

In built safety controls include:

- protection against cable breakage
- protection in case of hydraulic failure
- overload protection

ALL ROUNDER



BASE



ASYMMETRIC




QUICK LIFT





MF1705-93-OH-3T

'ALL ROUNDER'

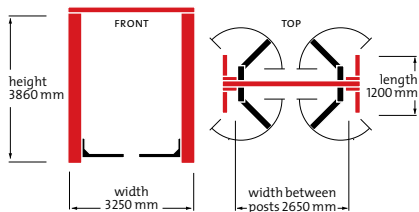


- 3 tonne hoist with overhead clear floor
- ideal for wide range of servicing requirements
- offers maximum flexibility for servicing
- four Pick-Up Pads included standard - JJ3



Footprint	3250 x 1200 mm
Lifting Capacity	3 tonnes
Width Between Posts	2650 mm
Max Raised Height	1900 mm
Min Lifting Time	27 seconds
Overall Height	3860 mm
Motor	3 phase
	<i>optional single phase available</i>

MF1705-85A/3T

'BASE'

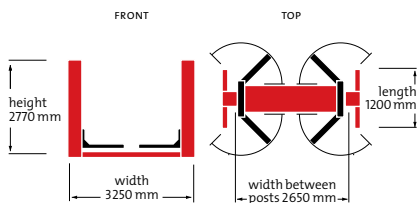


- 3 tonne hoist with base
- ideal for low ceiling height
- entry-level option
- four Pick-Up Pads included standard - JJ3



Footprint	3250 x 1200 mm
Lifting Capacity	3 tonnes
Width Between Posts	2650 mm
Max Raised Height	1900 mm
Min Lifting Time	27 seconds
Overall Height	2770 mm
Motor	3 phase
	<i>optional single phase available</i>

MF1705-OH-3T-AS

'ASYMMETRIC'

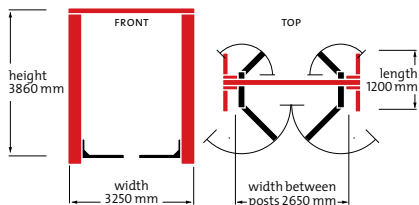


- 3 tonne hoist with asymmetric lifting arms
- ideal for work requiring greater access into car doors
- *single drive-in direction only*
- four Pick-Up Pads included standard - JJ3



Footprint	3250 x 1200 mm
Lifting Capacity	3 tonnes
Width Between Posts	2650 mm
Max Raised Height	1900 mm
Min Lifting Time	27 seconds
Overall Height	3860 mm
Motor	3 phase
	<i>optional single phase available</i>

MF1705-OH-3T-QL

'QUICK LIFT'

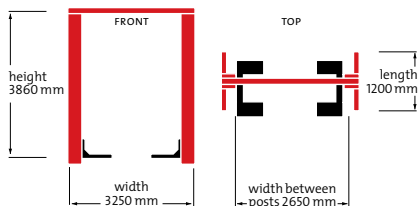


- 3 tonne hoist with drive over seal panel pickup tynes
- no readjusting arm position between lifts
- ideal for dealerships, or for servicing same or similar vehicles
- asymmetric arms for greater door access
- *single drive-in direction only*



Footprint	3250 x 1200 mm
Lifting Capacity	3 tonnes
Width Between Posts	2650 mm
Max Raised Height	1830 mm
Min Lifting Time	27 seconds
Overall Height	3860 mm
Motor	3 phase
	<i>optional single phase available</i>

2P4T-PREMIUM

'FOUR TONNE'

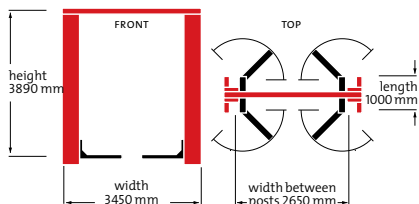


- 4 tonne hoist with overhead clear floor
- ideal for heavier vehicles and four-wheel drives
- EP10 Extension Pads are ideal accessories for difficult pick-up points on four-wheel drives
- four Pick-Up Pads included standard - JJ3



Footprint	3450 x 1000 mm
Lifting Capacity	4 tonnes
Width Between Posts	2650 mm
Max Raised Height	1900 mm
Min Lifting Time	35 seconds
Overall Height	3890 mm
Motor	3 phase
	<i>optional single phase available</i>


ACCESSORIES AND OPTIONS


 **240V Power**
optional 240 Volt single phase motor

 **Pick-Up Pads**
supports and stabilises vehicle pick-up points

 **EP10 Extension Pad**
provides valuable extra clearance for four-wheel-drives and vans

 **Quick Lift accessories**
including beam, extension pads and rubber blocks

 **Customisation**
Move control-unit positioning
Different post heights
Personalised colouring

 *For the full range of available accessories, please refer to the Two Post Hoist or Quick Lift Accessories brochures*

As the policy of Molnar Hoists is one of continuous improvement, the manufacturer reserves the right to change specifications without notice.

For more information, please contact us or your local Molnar Representative

T 08 7120 8700 F 08 8346 0097
E sales@molnarhoists.com.au
www.molnarhoists.com.au

onwards & upwards

